



REFRIGERATION

SERVING THE FOOD INDUSTRY SINCE 1951

REACH IN FREEZER

Item: 24261
Model: FR-CN-0737


Item: 24262
Model: FR-CN-1372

Item: 24264
Model: FR-CN-2057

*High Performance and Quality
Commercial Freezers*



WARRANTY
PARTS AND LABOR





Authorized Dealer

REFRIGERATION

REACH IN FREEZER



Detail Shots & Features



- 430 Stainless Steel exterior
- 304 Stainless Steel interior
- Digitally controlled temperature system
- Plastic coated shelves
- Bottom mount compressor
- Automatic defrost
- European controller and compressor
- Polyurethane insulation
- Interior lighting
- Self-closing doors
- Casters
- Lock mounted

	29-inch Freezer 1 Door	54-inch Freezer 2 Doors	81-inch Freezer 3 Doors
ITEM NUMBER	24261	24262	24264
MODEL	FR-CN-0737	FR-CN-1372	FR-CN-2057
DESCRIPTION	Freezer	Freezer	Freezer
TEMPERATURE RANGE	-22°C - 18°C / -7.5°F - 0°F	-22°C - 18°C / -7.5°F - 0°F	-22°C - 18°C / -7.5°F - 0°F
MAX AMBIENT TEMP RATING	38°C / 100.4°F	38°C / 100.4°F	38°C / 100.4°F
POWER	0.81 HP / 0.60 kW	1.05 HP / 0.78 kW	1.28 HP / 0.95 kW
ELECTRICAL	110V / 60Hz / 1Ph	110 V / 60Hz / 1Ph	110 V / 60Hz / 1Ph
AMPS	8.6	10.1	12.8
REFRIGERANT	R404a	R404a	R404a
ISOLATION MATERIAL	R141b	R141b	R141b
COOLING SYSTEM	Ventilated	Ventilated	Ventilated
NUMBER OF DOORS	1	2	3
NUMBER OF SHELVES	3	6	9
SHELF CAPACITY	90 lbs. / 41 kg.	90 lbs. / 41 kg.	90 lbs. / 41 kg.
EXTERIOR DIMENSIONS (WDH)	29 x 32" x 82.5" / 736.6 x 813 x 2095.5 mm	54" x 32" x 82.5" / 1371.6 x 813 x 2095.5 mm	81" x 32" x 82.5" / 2057 x 813 x 2095.5 mm
INTERIOR DIMENSIONS (WDH)	24.4" x 27" x 60.24" / 619.76 x 686 x 1530 mm	49.4" x 27" x 60.24" / 1254.8 x 685.9 x 1530 mm	76.3" x 27" x 60.24" / 1938 x 686 x 1530 mm
PACKAGING DIMENSIONS	31.5" x 34.6" x 85.4" / 800 x 879 x 2169 mm	56.3" x 34.6" x 85.4" / 1430 x 879 x 2169 mm	85" x 34.5" x 85.4" / 2159 x 876 x 2169 mm
NET VOLUME (CU. FT.)	20.6 cu. ft.	41.3 cu. ft.	66.5 cu. ft.
WEIGHT	333 lbs. / 151 kg.	496 lbs. / 225 kg.	705 lbs. / 320 kg.
PACKAGING WEIGHT	370 lbs. / 168 kg.	560 lbs. / 254 kg.	794 lbs. / 360 kg.

OMCAN INC.

Telephone: 1-800-465-0234
 Fax: (905) 607-0234
 E-mail: sales@omcan.com
 Website: www.omcan.com



Follow us to keep up to date with the latest news and offers






2017E&OE

REFRIGERATION




REACH IN FREEZER






NEMA
5 - 15
125 VAC / 15 AMP

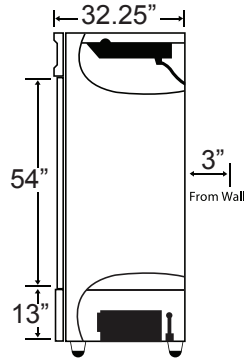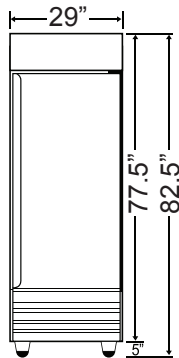

NEMA
5 - 20
125 VAC / 20 AMP

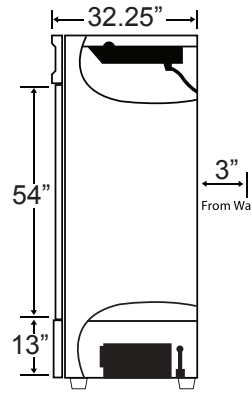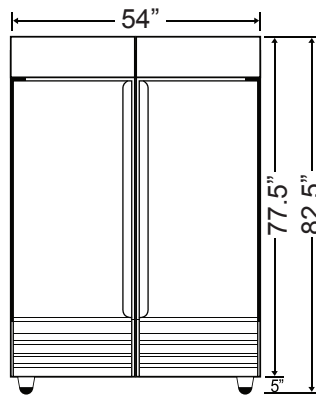

NEMA
5 - 20
125 VAC / 20 AMP

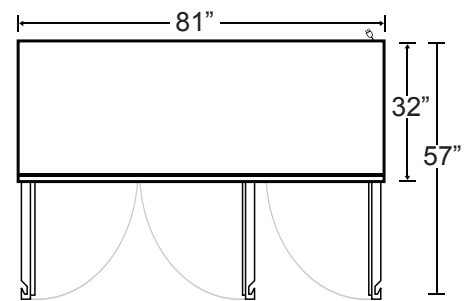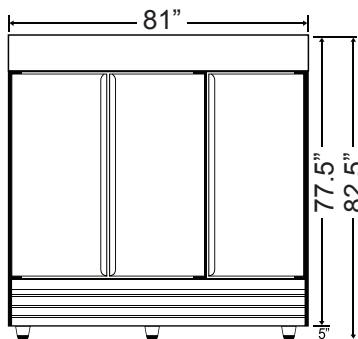

OMCAN INC.

Telephone: 1-800-465-0234

Fax: (905) 607-0234

E-mail: sales@omcan.com

Website: www.omcan.com



Follow us to keep up to date with the latest news and offers



2017E&OE