

## Grab and Go Open Refrigerated Floor Self-Serve Display

ITEM: 48265  
MODEL: RS-CN-0530-B

48266  
RS-CN-0700-B

48269  
RS-CN-1050-B



### Keep foods fresh and in customer-view with this high-performance open refrigerated floor display case.

A great addition to your establishment; providing convenience for customers to easily access merchandise. This open refrigerated display is equipped with a night curtain, which helps in reducing power consumption when not in use. The bright internal LED lighting complements the attractive finish and provides greater visibility for your displayed product. The adjustable shelf position is great for merchandising your products to your liking. It comes complete with digital temperature controls for accuracy and always fresh foods. This attractively designed display case was made to maximize space for cafes, restaurants, supermarkets and convenience stores. Use it to display dairy products, vegetables, fruits, and drinks.

Telephone: 1-800-465-0234



Fax: (905) 607-0234

Email: [sales@omcan.com](mailto:sales@omcan.com)


Website: [www.omcan.com](http://www.omcan.com)



Authorized Dealer



TECHNICAL DRAWING

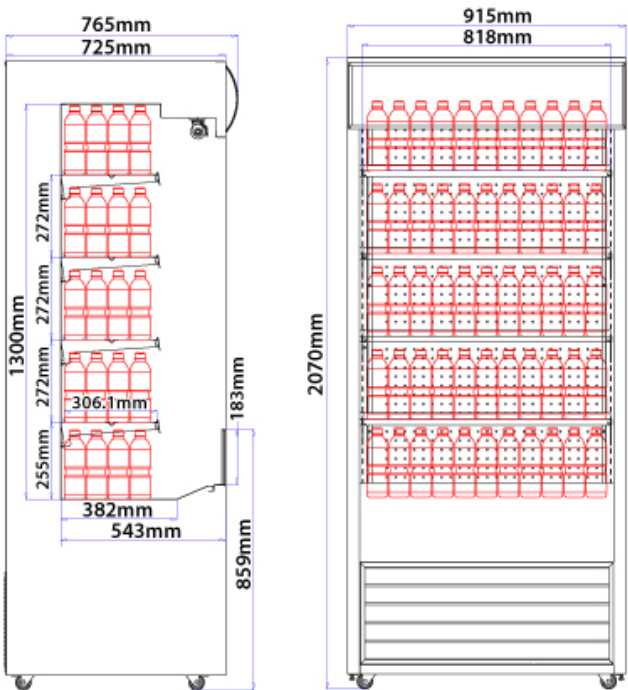


Item 43459 /48265

TECHNICAL SPECIFICATION

|                        |                                               |
|------------------------|-----------------------------------------------|
| Item                   | 48265                                         |
| Model                  | RS-CN-0530-B                                  |
| Capacity               | 18.71 cu. ft. (530L)                          |
| Shelf Load Capacity    | 55.1 lbs (25kg)                               |
| Number of Shelves      | 5                                             |
| Number of Casters      | 4                                             |
| Power                  | 1700 W                                        |
| Amps                   | 16 A                                          |
| Electrical             | 110V / 60Hz / 1Ph                             |
| Temperature Controller | Digital                                       |
| Temperature Range      | 2 to 10°C (35.6 to 50°F)                      |
| Refrigerant            | R290                                          |
| Type Of Climate        | 3                                             |
| Insulation Material    | Cyclopentane                                  |
| Defrosting             | Automatic                                     |
| Cooling System         | Forced Air                                    |
| Net Dimensions (WDH)   | 36" x 30.1" x 81.5"<br>(915 x 765 x 2070 mm)  |
| Gross Dimensions (WDH) | 40" x 33.5" x 87.8"<br>(1015 x 850 x 2230 mm) |
| Net Weight             | 335.1 lb. (152 kg.)                           |
| Gross Weight           | 388 lb. (176 kg.)                             |

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

TECHNICAL DRAWING

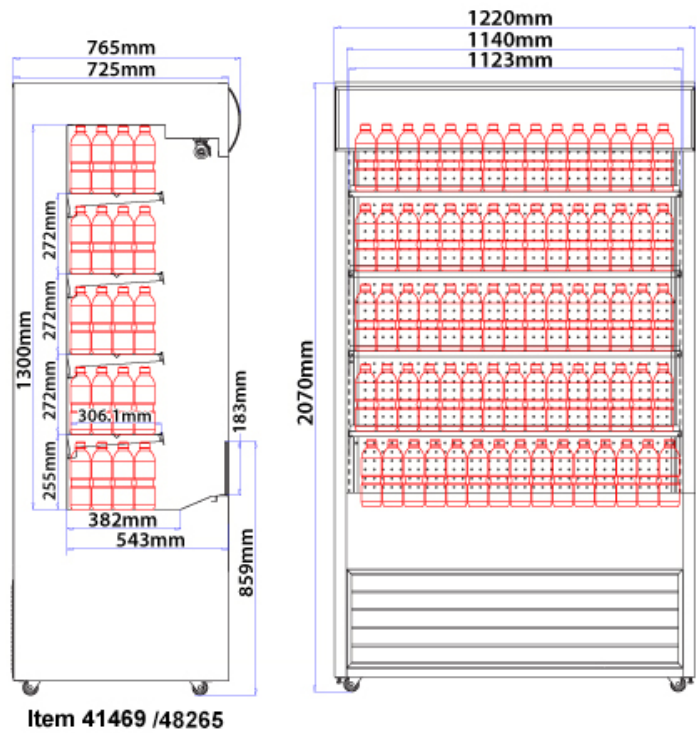


TECHNICAL SPECIFICATION

|                        |                                               |
|------------------------|-----------------------------------------------|
| Item                   | 48266                                         |
| Model                  | RS-CN-0700-B                                  |
| Capacity               | 24.72 cu. ft. (700L)                          |
| Shelf Load Capacity    | 66.1 lbs (30kg)                               |
| Number of Shelves      | 5                                             |
| Number of Casters      | 4                                             |
| Power                  | 2550 W                                        |
| Amps                   | 12.1 A                                        |
| Electrical             | 2200V / 60Hz / 1Ph                            |
| Temperature Controller | Digital                                       |
| Temperature Range      | 2 to 10°C (35.6 to 50°F)                      |
| Refrigerant            | R290                                          |
| Type Of Climate        | 3                                             |
| Insulation Material    | Cyclopentane                                  |
| Defrosting             | Automatic                                     |
| Cooling System         | Forced Air                                    |
| Net Dimensions (WDH)   | 48" x 30.1" x 81.5"<br>(1220 x 765 x 2070 mm) |
| Gross Dimensions (WDH) | 52" x 33.5" x 87.8"<br>(1320 x 850 x 2230 mm) |
| Net Weight             | 426.6 lb. (193.5 kg.)                         |
| Gross Weight           | 486.1 lb. (220.5 kg.)                         |

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

TECHNICAL DRAWING

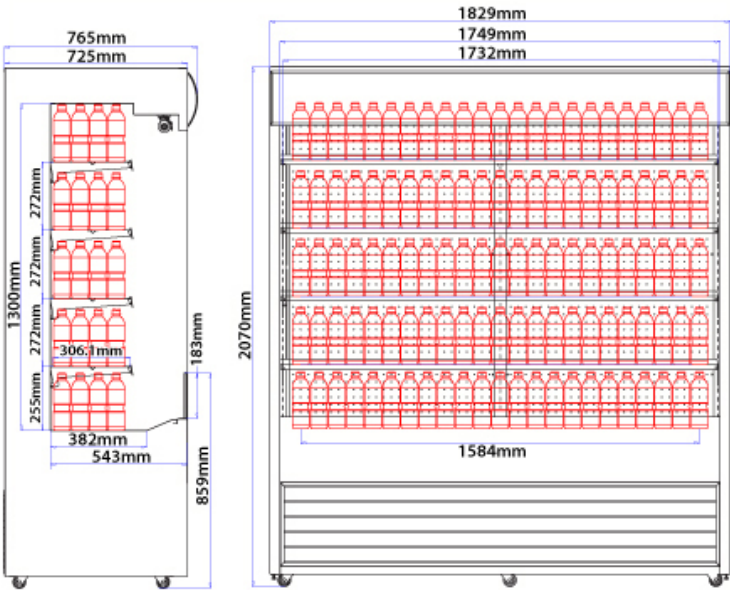

Item 43460 /48269

TECHNICAL SPECIFICATION

|                        |                                               |
|------------------------|-----------------------------------------------|
| Item                   | 48269                                         |
| Model                  | RS-CN-1050-B                                  |
| Capacity               | 37.08 cu. ft. (1050L)                         |
| Shelf Load Capacity    | 110.2 lbs (50kg)                              |
| Number of Shelves      | 5                                             |
| Number of Casters      | 4                                             |
| Power                  | 2400 W                                        |
| Amps                   | 11.5 A                                        |
| Electrical             | 220V / 60Hz / 1Ph                             |
| Temperature Controller | Digital                                       |
| Temperature Range      | 2 to 10°C (35.6 to 50°F)                      |
| Refrigerant            | R290                                          |
| Type Of Climate        | 3                                             |
| Insulation Material    | Cyclopentane                                  |
| Defrosting             | Automatic                                     |
| Cooling System         | Forced Air                                    |
| Net Dimensions (WDH)   | 72" x 30.1" x 81.5"<br>(1829 x 865 x 2070 mm) |
| Gross Dimensions (WDH) | 76" x 33.5" x 87.8"<br>(1930 x 850 x 2230 mm) |
| Net Weight             | 565.5 lb. (256.5 kg.)                         |
| Gross Weight           | 652.6 lb. (296 kg.)                           |

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.